



PRESS-FIT DOWEL CONNECTORS

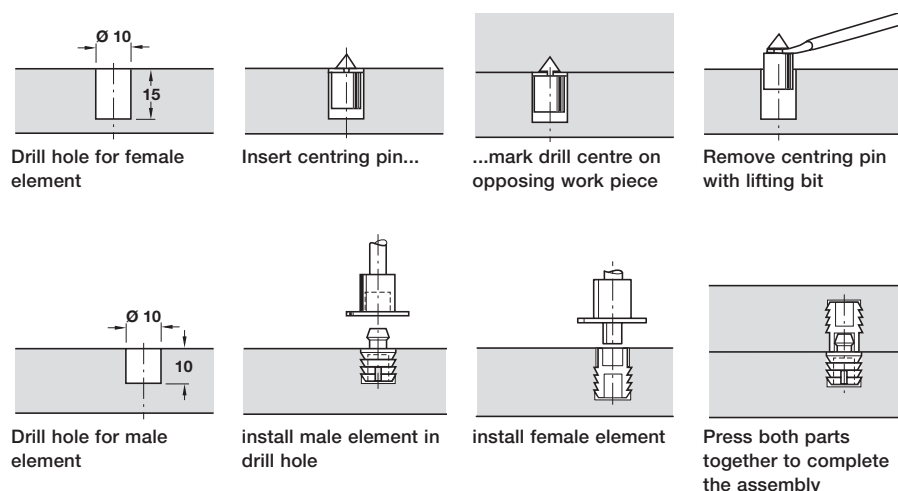

Two piece dowel connector, press-fit



- > For concealed fastening without nails or screws
- > Can be disconnected at any time and with parting resistance of up to 15 kg
- > Female element has four slots, male element incorporates a tapered plug which locks into position, ensuring a secure seat in the material and a strong joint
- > Natural coloured **polyamide**
- > Order qty: Multiples of 100 pcs



> Special tools and centring pin must be ordered separately for installation of press-fit connector, shown below

Type
2

Cat. No.

267.20.700

Centring pin



- > For installation of press fit connector
- > Bright steel
- > Order qty: Multiples of 10 pcs

Centring pin

Cat. No.

006.47.067

Set of tools



- > For installation of press fit connector
- > Comprising:
 - 1x handle
 - 1x lifting bit for centring pin
 - 1x punch (male)
 - 1x punch (female)
- > Order qty: 1 set


Set of tools

Cat. No.


006.47.003

PRESS-FIT DOWEL CONNECTORS

ixconnect

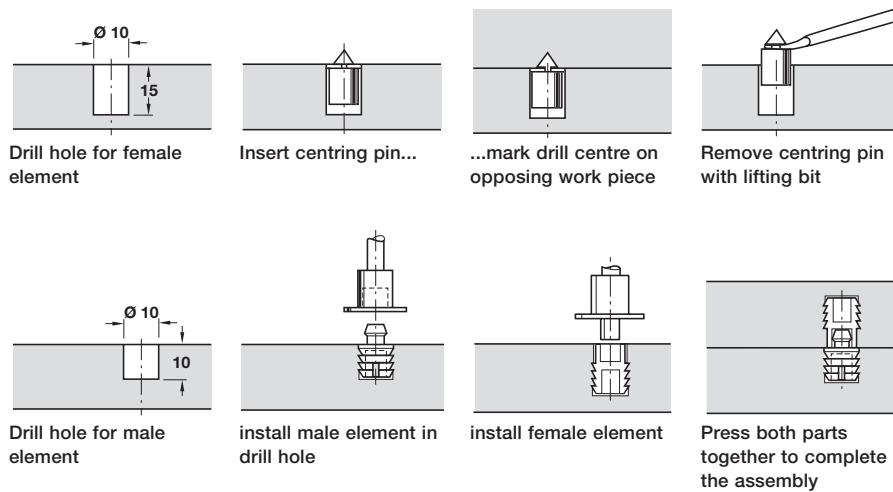

Two piece dowel connector, press-fit

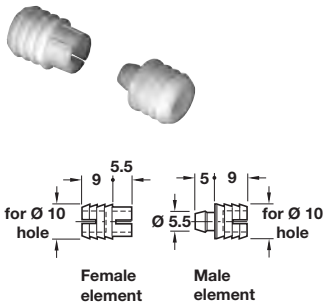

- > For concealed fastening without nails or screws
- > Can be disconnected at any time and with parting resistance of up to 15 kg
- > Female element has four slots, male element incorporates a tapered pin which locks into position, ensuring a secure seat in the material and a strong joint
- > Natural coloured finish
- > Order qty: Multiples of 100 pcs



> Special tools and centring pin must be ordered separately for installation of press-fit connector, shown below

Type

Cat. No.

267.20.700

Centring pin



- > For installation of press fit connector
- > Bright steel
- > Order qty: Multiples of 10 pcs

Cat. No.

Centring pin

006.47.067

Set of tools



- > For installation of press fit connector
- > Comprising:
 - 1x handle
 - 1x lifting bit for centring pin
 - 1x punch (male)
 - 1x punch (female)
- > Order qty: 1 set

Cat. No.

Set of tools

006.47.003