

HÄFELE 110° CAM OR STANDARD ADJUSTMENT HINGE




- > Opening angle 110°, Ø 35 mm cup
- > Screw fixing cup
- > Click on or slide on arm
- > For door thickness up to 22 mm see table below
- > Full overlay mounting steel cup and hinge arm, half overlay and inset mounting steel cup and zinc alloy arm
- > Available with cam or standard depth adjustment
- > Order fixing screws separately
- > Order qty: 1 pc

Häfele 110° hinge

Minimum gap for doors with chamfered edges (r = 1 mm) with factory setting


Door thickness mm	Distance to cup E mm		
	3.0	4.0	5.0
16	0.3	0.3	0.3
17	0.5	0.5	0.5
18	0.7	0.7	0.7
19	1.0	0.9	0.9
20	1.3	1.2	1.2
21	1.7	1.6	1.5
22	2.5	2.1	2.0
Minimum gap F			

Drilling pattern for cup fixing



Soft close clip on fitting for sprung hinges shown on page 328

Full overlay mounting, cam adjustment



Door overlay mm							
	13	14	15	16	17	18	
				3	4	5	0
	3	4	5				3
Distance to cup E mm				Mounting plate height mm			




Fixing

Click on

Screw fixing

312.29.500

Half overlay mounting, cam adjustment

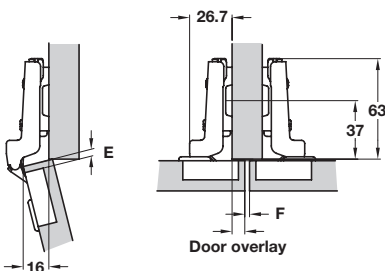

Door overlay mm							
	4	5	6	7	8	9	
				3	4	5	0
	3	4	5				3
Distance to cup E mm				Mounting plate height mm			



Type


Click on

Cat. No.

312.29.501

DRAWER SYSTEMS, STAYS AND HINGES 2015, © Häfele U.K. Ltd 2015. Dimensional data not binding. We reserve the right to alter specifications without notice.

Full overlay mounting, standard adjustment




Door overlay mm							
13	14	15	16	17	18		
			3	4	5		0
3	4	5					3
Distance to cup E mm				Mounting plate height mm			



Fixing	Click on	Slide on
Screw fixing	312.20.550	312.00.550

Half overlay mounting, standard adjustment

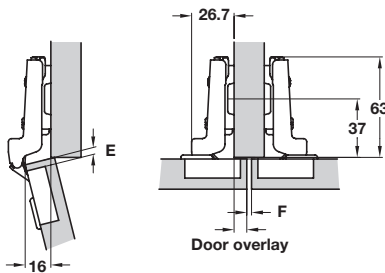


Door overlay mm							
4	5	6	7	8	9		
			3	4	5		0
3	4	5					3
Distance to cup E mm				Mounting plate height mm			



Type	Click on	Slide on
Cat. No.	312.20.551	312.00.551

Inset mounting, standard adjustment



Door thickness mm							
16	17	18	19	20	21		
3	3	3					2
4/5	4	4	3	3	3		3
Distance to cup E mm				Gap F mm			

Dimensions given are using a 3 mm mounting plate



Type	Click on	Slide on
Cat. No.	312.20.552	312.00.552

YOU ALSO NEED: **MOUNTING PLATES**
Pages 326-329

FIXING SCREWS
Page 468

OPTIONAL ACCESSORIES
Pages 328, 403-417

Mounting plate for Häfele concealed hinges



Click on

Slide on



A wider range of mounting plates are shown on pages **326-329**

- > Hospa screw fixing
- > One part plate with ± 2 mm height adjustment via slots
- > Nickel-plated steel
- > Order fixing screws separately
- > Order qty: 1 pc

BEST SELLER



Height	Click on	Slide on
0 mm	312.30.540	312.10.560

Approved by Product Info. Dept.

PAGE AMENDED
06.01.16/1

HÄFELE 110° CAM OR STANDARD ADJUSTMENT HINGE




- > Opening angle 110°, Ø 35 mm cup
- > Screw fixing cup
- > Click on or slide on arm
- > For door thickness up to 22 mm see table below
- > Full overlay mounting steel cup and hinge arm, half overlay and inset mounting steel cup and zinc alloy arm
- > Available with cam or standard depth adjustment
- > Order fixing screws separately
- > Order qty: 1 pc

Häfele 110° hinge

Minimum gap for doors with chamfered edges (r = 1 mm) with factory setting


Door thickness mm	Distance to cup E mm		
	3.0	4.0	5.0
16	0.3	0.5	0.5
17	0.5	0.5	0.5
18	0.5	0.7	0.5
19	1.0	0.9	0.9
20	1.2	1.2	1.2
21	1.7	1.5	1.5
22	2.1	2.1	2.1

Drilling pattern for cup fixing



Soft close clip on fitting for sprung hinges shown on page 328

Full overlay mounting, cam adjustment



Door overlay mm	Mounting plate height mm						
	13	14	15	16	17	18	
				3	4	5	0
	3	4	5				3




Fixing

Click on

Screw fixing

312.29.500

Half overlay mounting, cam adjustment

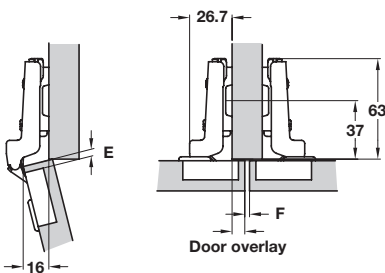

Door overlay mm	Mounting plate height mm						
	4	5	6	7	8	9	
				3	4	5	0
	3	4	5				3



Type


Click on

Cat. No.

312.29.501

DRAWER SYSTEMS, STAYS AND HINGES 2015, © Häfele U.K. Ltd 2015. Dimensional data not binding. We reserve the right to alter specifications without notice.

Full overlay mounting, standard adjustment




Door overlay mm							
13	14	15	16	17	18		
			3	4	5		0
3	4	5					3
Distance to cup E mm				Mounting plate height mm			



Fixing	Click on	Slide on
Screw fixing	312.20.550	312.00.550

Half overlay mounting, standard adjustment

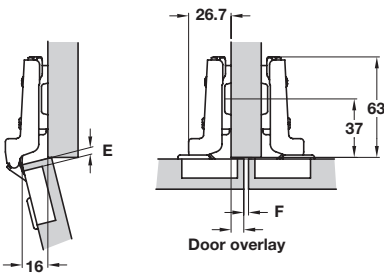


Door overlay mm							
4	5	6	7	8	9		
			3	4	5		0
3	4	5					3
Distance to cup E mm				Mounting plate height mm			



Type	Click on	Slide on
Cat. No.	312.20.551	312.00.551

Inset mounting, standard adjustment



Door thickness mm						
16	17	18	19	20	21	
3	3	3				2
4/5	4	4	3	3	3	3
Distance to cup E mm				Gap F mm		

Dimensions given are using a 3 mm mounting plate



Type	Click on	Slide on
Cat. No.	312.20.552	312.00.552

YOU ALSO NEED:

MOUNTING PLATES
Pages 326-329

FIXING SCREWS
Page 468

OPTIONAL ACCESSORIES
Pages 328, 403-417

Mounting plate for Häfele concealed hinges



Click on

Slide on



A wider range of mounting plates are shown on pages **326-329**

- > Hospa screw fixing
- > One part plate with ± 2 mm height adjustment via slots
- > Nickel-plated steel
- > Order fixing screws separately
- > Order qty: 1 pc



Height	Click on	Slide on
0 mm	312.30.540	312.10.560