


# STANDARD 170° HINGES




- > Zero protrusion makes this hinge ideal for cabinets with internal drawer boxes or pull out shelves
- > Opening angle 170° (Can be reduced to 120°, see page 398)
- > Sprung
- > Ø 35 mm cup
- > Screw fixing or dowel fixing cup
- > Choice of slide on or click on arms
- > Soft close compatible
- > With finger protection
- > Heavy duty, for doors up to 26 mm thick see table below
- > For doors more than 23.5 mm please try test installation first
- > Nickel-plated zinc alloy cup and arm
- > Order fixing screws separately for screw fixing versions
- > Order qty: Multiples of 10 pcs

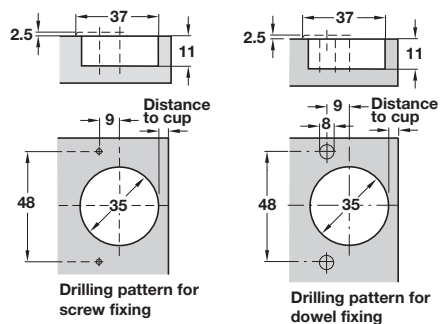


170° Hinge

Door thickness mm	Distance to cup E mm				
	3.0	4.0	5.0	6.0	7.0
16	0.0	0.0	0.0	0.0	0.0
18	0.0	0.0	0.0	0.0	0.0
19	0.0	0.0	0.0	0.0	0.0
20	0.0	0.0	0.0	0.0	0.0
22	0.0	0.0	0.0	0.0	0.0
23	0.0	0.0	0.0	0.0	0.0
24	0.0	0.0	0.0	0.5	1.8
25	6.5	6.5	6.0	5.5	4.8
26	10.5	9.5	8.5	7.5	6.5
Minimum gap					

Zero protrusion for application with inset drawers. With 0 cranking and 0 height of mounting plate the door is flush with the cabinet at 90°



## 170° Full overlay/inset mounting

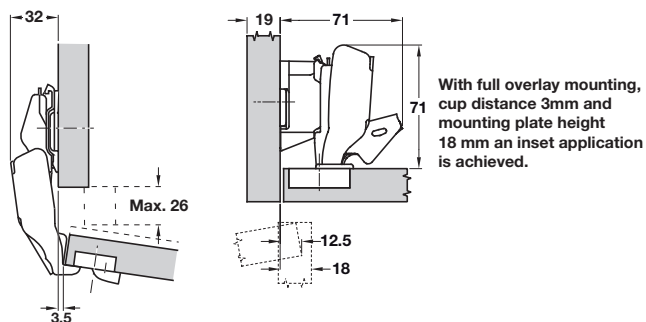


Door overlay mm							
15	16	17	18	19	20	21	
		4	5	6	7	8	0
4	5	6	7	8			2
Distance to cup E mm				Mounting plate distance mm			



Fixing	Slide on	Click on
Screw fixing	323.21.609	322.21.630
Dowel	-	322.21.670

## 170° Half overlay/twin mounting



Door overlay mm							
6	7	8	9	10	11	12	
			4	5	6	7	0
	4	5	6	7	8		2
Distance to cup E mm				Mounting plate distance mm			



Fixing	Slide on	Click on
Screw fixing	323.21.618	322.21.631



## YOU ALSO NEED:

**MOUNTING PLATES**  
Pages 394-396

**FIXING SCREWS**  
Page 468

**OPTIONAL ACCESSORIES**  
Pages 397-399, 403-417

## Super compact cruciform mounting plate



Click on

Slide on

- > For Hospa screw fixing
- > Two part plate with external height adjustment
- > Nickel-plated zinc alloy and pressed steel
- > Order fixing screws separately
- > Order qty: Multiples of 10 pcs

**BEST  
SELLER**




Height	Click on	Slide on
0 mm	322.85.750	323.85.701



A wider range of mounting plates are shown on pages **394-396**

## Soft close fitting, for screw fixing cup



- > For use with sprung 170° concealed hinges with screw or dowel fixing cup
- > The quantity and position of soft close will depend on door height and weight, see chart above
- > No fixing materials required, clips onto hinge arm
- > Zinc alloy
- > Order qty: 1 pc

Finish	Cat. No.
Nickel plated	322.67.170