


**Twin wheel swivel castor, hooded, Ø 50 mm wheels, M10 thread fixing**



Photo shows version without brake



- > With M10 x 15 mm threaded bolt
- > Matt black plastic
- > Order qty: 1 pc




> M10 T-nut for mounting thread fixing castors under wooden bases are shown on page 111

Wheel Ø	Load capacity	Without brake	With brake
Ø 50 mm	40 kg	660.07.324	660.08.324

**Swivel castor, special use, plate fixing**



Photo shows version with brake

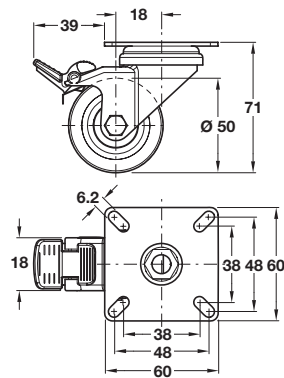


- > With screw on 60 x 60 mm mounting plate
- > Galvanized steel housing with black polyamide wheel with grey solid rubber tyre
- > Order qty: 1 pc



Wheel Ø	Load capacity	Without brake	With brake
Ø 50 mm	40 kg	663.06.910	663.16.910

**Fixed castor, special use, plate fixing**



- > Fixed castor; without swivel
- > With screw on 60 x 60 mm mounting plate
- > Galvanized steel housing with black polyamide wheel with grey solid rubber tyre
- > Order qty: 1 pc




Wheel Ø	Load capacity	Without brake
Ø 50 mm	40 kg	663.07.910

**Twin wheel swivel castor, hooded, Ø 50 mm wheels, M8 thread fixing**



Photo shows version without brake



- > With M8 x 16 mm threaded bolt
- > Suitable for use on soft floor coverings such as carpet
- > Matt black plastic
- > Order qty: 1 pc




> M8 T-nut for mounting thread fixing castors under wooden bases are shown on page 111

Wheel Ø	Load capacity	Without brake	With brake
Ø 50 mm	45 kg	660.66.352	660.66.353

**Twin wheel swivel castor, hooded, Ø 50 mm wheels, M10 thread fixing**



Photo shows version without brake



- > With M10 x 15 mm threaded bolt
- > Matt black plastic
- > Order qty: 1 pc




> M10 T-nut for mounting thread fixing castors under wooden bases are shown on page 111

Wheel Ø	Load capacity	Without brake	With brake
Ø 50 mm	40 kg	660.07.324	660.08.324

**Swivel castor, special use, plate fixing**



Photo shows version with brake

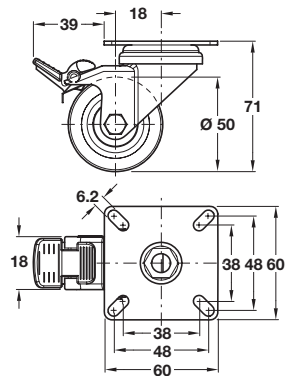


- > With screw on 60 x 60 mm mounting plate
- > Galvanized steel housing with black polyamide wheel with grey solid rubber tyre
- > Order qty: 1 pc



Wheel Ø	Load capacity	Without brake	With brake
Ø 50 mm	40 kg	663.06.910	663.16.910

**Fixed castor, special use, plate fixing**



- > Fixed castor; without swivel
- > With screw on 60 x 60 mm mounting plate
- > Galvanized steel housing with black polyamide wheel with grey solid rubber tyre
- > Order qty: 1 pc




Wheel Ø	Load capacity	Without brake
Ø 50 mm	40 kg	663.07.910

**Twin wheel swivel castor, hooded, Ø 50 mm wheels, M8 thread fixing**



Photo shows version without brake



- > With M8 x 16 mm threaded bolt
- > Suitable for use on soft floor coverings such as carpet
- > Matt black plastic
- > Order qty: 1 pc



> M8 T-nut for mounting thread fixing castors under wooden bases are shown on page 111

Wheel Ø	Load capacity	Without brake	With brake
Ø 50 mm	45 kg	660.66.352	660.66.353