



TECHNICAL SPECIFICATION SHEET

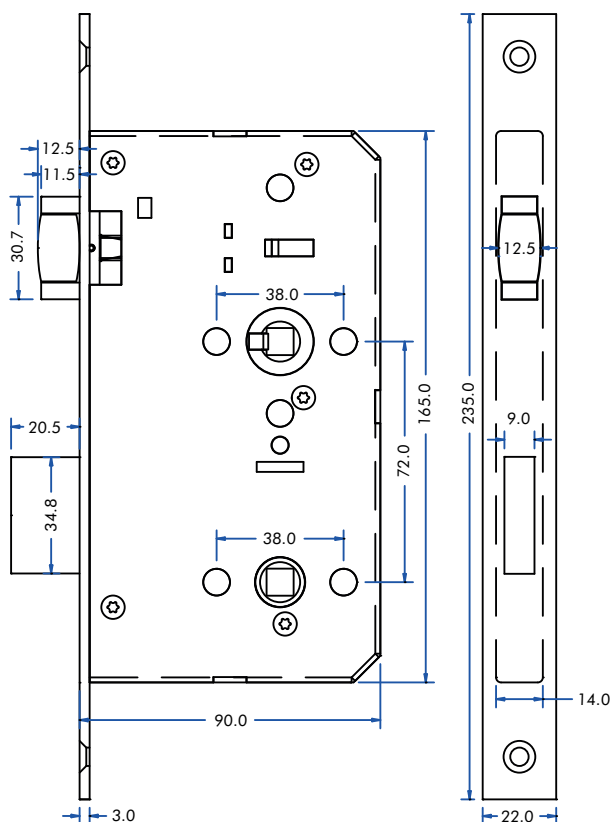

TYPICAL CONFIGURATION

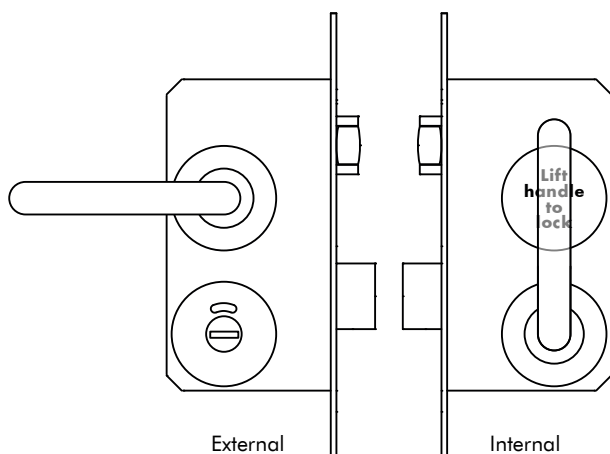

PRODUCT SPECIFICATIONS

- Available in 60mm backsets
- Adjustable roller latch bolt
- Case size (60mm backset) - 90 x 165mm
- Face plate - 235 x 22 x 3mm
- Stainless Steel latch bolt & dead bolt
- Includes grip tight follower spring
- Includes anti-rattle strike and dust box
- Available with square & radius forends
- All factory QC tested
- 10 year mechanical guarantee
- Complies with the design requirements of BS8300

OPERATES IN THE FOLLOWING MANNER

External / Outside access.

The roller latch bolt is operated externally with one half of the unsprung lever set, this release the roller latch bolt as normal. Underneath the lever is the release & indicator, this operates in the same manner as bathroom type coin releases.


Internal / Inside access.



The internal side of the lever set will be configured such that, the latch bolt is blanked off with a engraved covered escutcheon. The deadbolt features the second lever handle, and by throwing the handle up "extends the deadbolt" & locks the door. By turning the handle down the deadbolt is withdrawn, further downward action of the lever withdraws the roller latch bolt, allowing exit.

LEVER SET INCLUDES:-

- 2 Lever Handles (Unsprung)
- 2 x 8mm Spindles
- Bolt Through Fixings
- Release Indicator
- "Lift Handle To Lock" Escutcheon

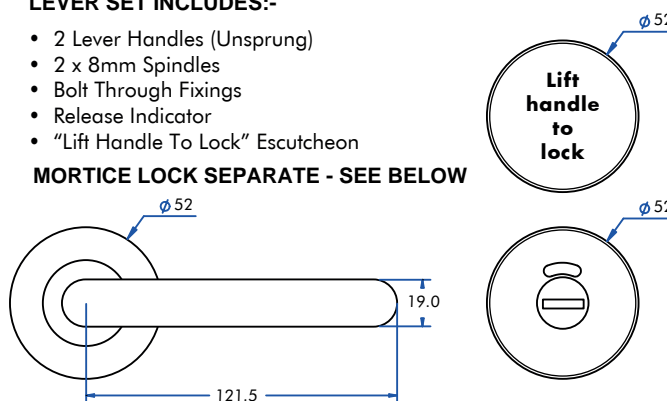MORTICE LOCK SEPARATE - SEE BELOW



	DESCRIPTION	FINISH	ADDITIONAL INFO.
ZOOLTLLSS	LIFT TO LOCK DIN ROLLER LOCK 72CC 60/90	SS	Lift to lock function
ZOOLTLLSS	LIFT TO LOCK LEVER SET PUSH ON ROSE	SS	Lift to lock function
HI-SPECIFICATION LOCK-TECH [®] ARCHITECTURAL HARDWARE 57-60 OXFORD STREET SWANSEA SA1 3JD T 01792 655680 F 01792 462243 E sales@lock-tech.co.uk W www.lock-tech.co.uk		  URS is a member of Registrar of Standards (Holdings) Ltd.	